

Rongsheng



嘉兴市荣盛救生设备有限公司
JIAXING RONGSHENG LIFESAVING EQUIPMENT CO., LTD.
地址: 浙江省嘉兴市秀洲区王店镇姚家路159号
ADD: No.159, Yaojia Road, Wangdian Town, Xiuzhou
District, Jiaxing City, Zhejiang, P.R. CHINA
电话/TEL: +86-573-83324318
传真/FAX: +86-573-83325522
网址/Web: www.rsjs.com
邮箱/Email: rsjs@rsjs.com



Rongsheng

FOCUS ON SAFETY
CATALOGUE

www.rsjs.com

JIAXING RONGSHENG LIFESAVING EQUIPMENT CO.,LTD.



About 关于荣盛 RONGSHENG

嘉兴市荣盛救生设备有限公司成立于1983年,位于新兴开放城市-----嘉兴。东临上海,西接杭州,南连宁波,北靠苏州,交通十分便利。公司占地面积8600平方米,建筑面积12800平方米。是专业从事船舶救生设备、消防设备的生产型企业。

公司具有强大的研发、设计、制造、销售部门。主要船用救生产品包括:浸水保温救生服、救生衣、救生灯具,急救药箱,应急饮用水,应急口粮、保温用具、静水压力释放器、雷达反射器、登乘绳梯;船用消防产品包括:紧急逃生呼吸装置、正压式消防空气呼吸器、消防隔热防护服、消防斧等;

长期以来,公司始终坚持“优质、诚信、准时、周到”的企业经营宗旨,公司在2002年率先通过了国际质量管理体系认证(ISO9001 / ISO22000),所有产品均获得中国船级社CCS认可,部分产品通过DNV.GL、RINA、KR、LR、ZY认可并获得MED证书。完善的质量管理体系,严谨的工艺管理,强大的技术团队和优秀的管理团队,使公司在同行业中处于领先地位。产品深受国内外客商的亲睐!

公司将一如既往地坚持质量第一、信誉第一、用户第一的经营方针。不断学习国际先进管理经验,以创品牌经营模式为思路、服务于国内外客商。以我们的一份热情,真诚地欢迎您来公司指导工作,洽谈业务,共创未来!

Jiexing Rongsheng Lifesaving Equipment Co., Ltd. was founded in 1983, located in the emerging open city ----- Jiexing, which is in the west of Shanghai, east of Hangzhou, north of Ningbo, south of Suzhou, the traffic is very convenient here. The Company covers an area of 8600 square meters, construction area of 12,800 square meters. specialized in manufacturer of marine life-saving equipment & fire fighting equipment.

The Company has strong R & D, designing, manufacturing, sales department . the main marine life-saving products include: immersion suits, life jackets, life-saving light, first aid kits, emergency drinking water, food rations, thermal protective aid, hydrostatic release unit, radar reflector, embarkation ladder; marine fire fighting products include: Emergency escape breathing devices, positive pressure breathing apparatus, fireman's protective suit, fire insulation, fire axes, etc.;

We regards "quality, integrity, timely and thoughtful "as business purposes since its foundation, we have passed the international quality management system certification (ISO9001/ISO22000) since 2002, all products obtain CCS certificate (China Classification Society), some products obtain MED certificate through DNV.GL, RINA, KR, LR, ZY. With Good quality management system, strict process management, strong technical team and excellent management team, our company become the leader in marine Lifesaving industry. Our Products are popular among both domestic and overseas customers.


Our company will continue to adhere to quality first, reputation first, customer first as business policy. Keep Learning international advanced management experience, with good brand management, to serve customer both domestic and abroad. we sincerely welcome you to visit our company and talk business, to create a better future!

目录

Rongsheng

保温服	1
IMMERSION SUIT	
气胀式救生衣	5
INFLATABLE LIFE JACKET	
救生衣	9
LIFE JACKET	
休闲救生衣	14
LEISURE LIFEJACKET	
救生衣灯	15
LIFEJACKET LIGHT	
AIS个人搜救报位信标 (RS-MOB-1)	16
Professional Man Over Board Device Incorporating Both AIS And Position Beacon (RS-MOB-1)	
充气救生衣配件	17
INFLATABLE LIFEJACKET ACCESSORIES	
工作服	18
COVERALL	
救生圈	19
LIFEBUOY	
救生圈灯	21
LIFEBUOY LIGHT	
消防员战斗服	23
FIREMAN SUIT	
自给正压式空气呼吸器	24
Self-Contained Positive Pressure Air Breathing Apparatus	
空气呼吸器配件	25
SCBA Accessories	
紧急逃生呼吸装置	27
EMERGENCY ESCAPE BREATHING DEVICES	
消防员装备配件	28
FIREMAN OUTFIT ACCESSORIES	

消防配件	29
FIRE ACCESSORIES	
救生筏	31
LIFERAFT	
救生食品和急救药包	33
Survival Food and First Aid Kit	
救生筏灯	34
LIFERAFT LIGHT	
救生筏配件	35
LIFERAFT ACCESSORIES	
救生筏支架、释放器	37
LIFERAFT BRACKET,HRU	
雷达反射器	38
RADAR REFLECTOR	
绳梯	39
LADDER	
绳梯踏板、吸盘	40
LADDER STEP,MAGNET	
担架	41
STRETCHER	
气动抛绳枪	43
PNEUMATIC LINE THROWERS	
遥控智能救生圈	44
REMOTE CONTROL SMART LIFEBUOY	
船用配件	45
MARINE ACCESSORIES	
化学品防护服	47
CHEMICAL PROTECTIVE CLOTHING	
一次性防护服	48
COVERALL	
电动送风过滤呼吸器/防弹衣	49
Powered Air Purifying Respirator / Bulletproof Vests	
防弹衣	50
BULLETPROOF VESTS	

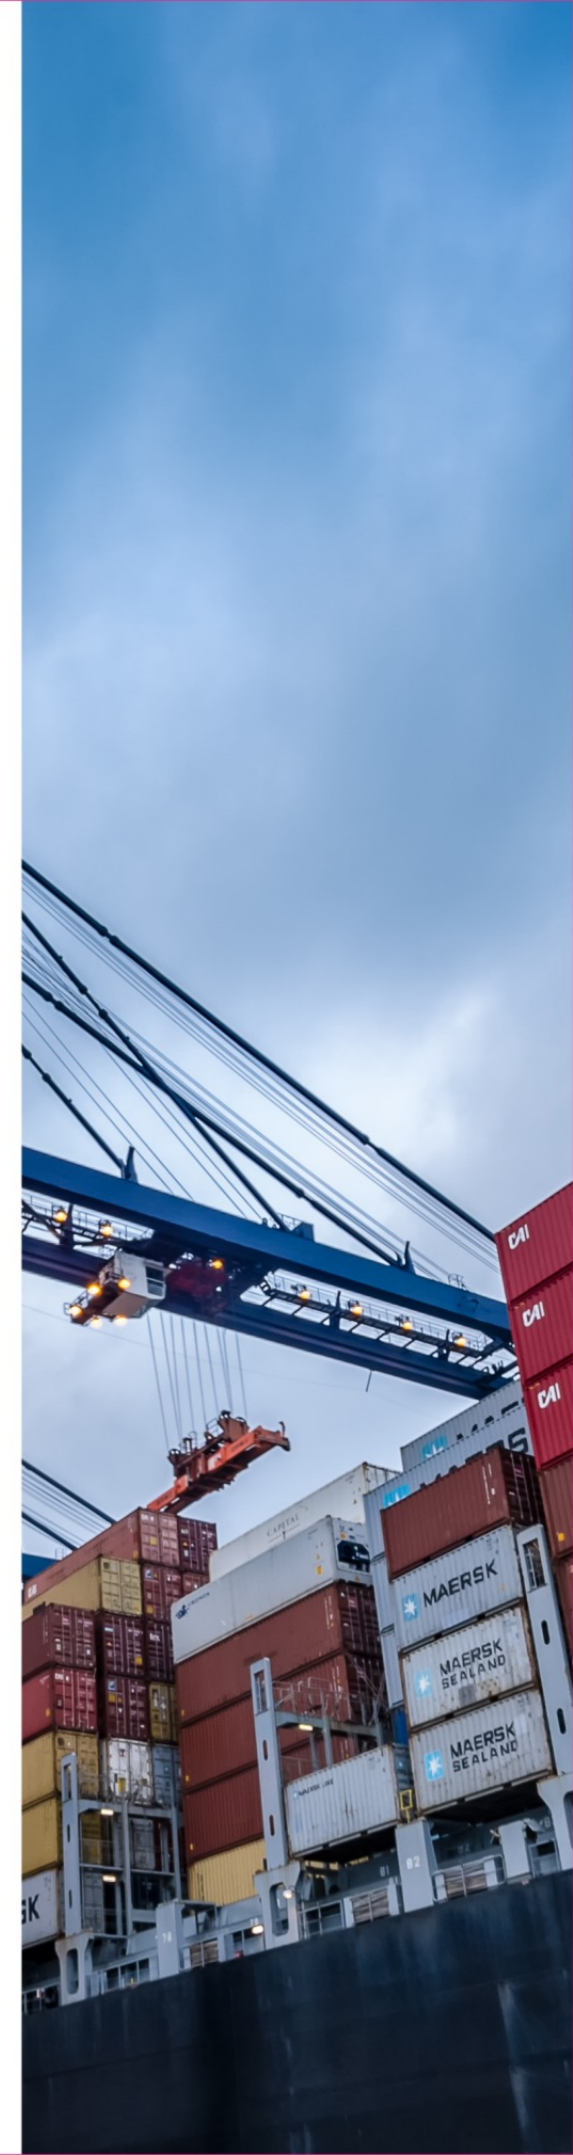







- ◆ 主要材质：CR氯丁橡胶 (5mm)
 - ◆ 设计：需加穿救生衣
 - ◆ 亮点：高亮度的荧光绿色面料，搭配5指的橡胶手套
 - ◆ 另配有可脱卸的3指氯丁橡胶手套
 - ◆ 反光带：400CM²面积的SOLAS 反光带
 - ◆ 保温性能：在0°C 到2°C的平静水流中浸泡6小时后，体温不低于通常体温2°C
 - ◆ 每件衣服满足SOLAS1974及其最新修正案，生产完成后均做好气密测试，合格后方可包装销售
-
- ◆ Main material: Neoprene (Thickness:5mm)
 - ◆ Design:Designed to be worn in conjunction with a lifejacket
 - ◆ Highlights: High visible fluorescent green fabric, with five-finger rubber gloves. It is also equipped with removable three-finger neoprene gloves
 - ◆ Reflective tape: 400CM² SOLAS Reflective tape
 - ◆ Thermal Performance:The suit does not allow the body temperature to drop by more than 2 degrees when immersed for aperiod of 6 hours when the water temperature is between 0 and 2 degrees
 - ◆ Each suit satisfies SOLAS 1974 and its latest amendments. After the production is completed, the air tightness test will be done, and only after it is qualified can it be packaged and sold



Immersion Suits Insulated "RSF-IV"

SPECIFICATIONS	Adult	Adult	Adult	Adult
SIZE	Small	Medium	Large	Extra large
SOLAS				
HEIGHT RANGE(mm)	1500-1650	1650-1800	1800-1950	1950-2050

橡胶手套同样适用于RSF-IV
Rubber gloves are available
on demand and suitable with RSF-IV



检修工具

Test Kit For Immersion Suit

- ◆ 使用充气泵或者外接气源，对保温救生服进行充气以检验其气密性，并对漏气部分进行维修
- ◆ 工具组成：
 1. 面部夹具2块、压力表一只、阀门接件一套、手动充气泵一只
 2. 修补面料一块、胶水一支、小剪刀一把、小毛刷一把、粉笔一块
- ◆ Use air pump or external gas source, test the immersion suits air tightness by inflating gas to it, repair the air leakage part
- ◆ Tools composition:
 1. 2 pcs face fixture, 1 pc pressure gauge, 1 set valve connection, 1 pc hand pump
 2. 1 pair Patch Fabrics, 1 pc glue, 1 pc scissors, 1 pc hairbrush 1 pc chalk



保温服 IMMERSION SUIT

RONGGUI

RSF-II / RSF-III



- ◆ 主要材质: CR氯丁胶(5mm)
- ◆ 设计: RSF-II不需要加穿救生衣
RSF-III 需要加穿救生衣
- ◆ 尺寸: S, M, L &XL
- ◆ 适合人群: 1500-2050mm
- ◆ 手套: 3指氯丁橡胶手套
- ◆ 每件衣服满足SOLAS1974及其修正案, 生产完成后均做好气密测试, 合格后方可包装销售

- ◆ Main material: CR Neoprene (Thickness:5mm)
- ◆ Design:RSF-II is designed to be worn WITHOUT a lifejacket
RSF-III is designed to be worn in conjunction with a lifejacket
- ◆ Size: S, M, L & XL
- ◆ User height: 1500-2050mm
- ◆ Gloves: Three fingers neoprene gloves
- ◆ Each suit satisfies SOLAS 1974 and its latest amendments. After the production is completed, the air tightness test will be done, and only after it is qualified can it be packaged and sold



型号 Model	颜色 Color	尺码 Size	身高 (mm) Size for height (ft)
RSF-II	红色 Red	S	1500-1650 4.9-5.4
RSF-II	红色 Red	M	1650-1800 5.4-5.9
RSF-II	红色 Red	L	1800-1950 5.9-6.4
RSF-II	红色 Red	XL	1950-2050 6.4-6.7
RSF-III	红色 Red	S	1500-1650 4.9-5.4
RSF-III	红色 Red	M	1650-1800 5.4-5.9
RSF-III	红色 Red	L	1800-1950 5.9-6.4
RSF-III	红色 Red	XL	1950-2050 6.4-6.7

保温服 IMMERSION SUIT

儿童保温服

Child Immersion Suit

- ◆ 符合SOLAS及其最新修正案
- ◆ 主要材质: CR氯丁胶 5mm
- ◆ 设计: 需加穿救生衣
- ◆ 手套: 3指氯丁橡胶手套
- ◆ 保温性能: 保温
- ◆ 适合人群: 儿童
- ◆ 防水的存储袋

- ◆ Comply with SOLAS MED regulations
- ◆ Main material: CR Neoprene (5mm thickness)
- ◆ Design: Additional lifejacket required
- ◆ Gloves: Three finger Neoprene gloves
- ◆ Available size: Child
- ◆ Thermal protective: The suit also provide thermal protection
Waterproof storage bag included



保温服存放箱

Immersion suit storage box

- ◆ 尺寸: 1200*600*600mm
- ◆ 材质: 不锈钢
- ◆ 可根据客户要求订制
- ◆ Size: 1200 * 600 * 600 mm
- ◆ Material: Stainless steel
- ◆ Can be customized



气胀式救生衣

INFLATABLE LIFE JACKET

RONGGUI

RSY-150TS-2



充气救生衣双气囊设计符合根据经MSC 200(80)和MSC 207(81)修订的MSC 81(70)的SOLAS 2010法规。救生衣穿着方便又舒适。成人通用的尺寸，适合最小体重为43公斤，最大胸围为1750毫米的所有人群

- 1.150N双气囊SOLAS 救生衣
- 2.适合绝大多数的保温服使用
- 3.在两个对称的气囊上使用2个33克二氧化碳小气瓶
- 4.高质量400D 的外包布
- 5.适合所有成人穿着
- 6.可选择哈马/UML/国产的激发装置
- 7.添加了跨带来保证安全
8. SOLAS 认可的衣灯可供选择
- 9.可调节的腰部安全带
- 10.魔术贴设计气囊更容易释放



The inflatable lifejacket Twin Chamber is designed to meet the SOLAS 2010 regulations according to MSC 81(70) as amended by MSC 200(80) and MSC 207(81). The lifejacket is both easy to don and comfortable. It is a universal adult size suitable from a minimum weight of 43kg and will fit a maximum chest size of 1750mm

- 1.150N Twin chamber SOLAS approved lifejacket
- 2.Suitable for use with most Immersion and abandonment suits
- 3.Uses 2 x 33g cylinders on symmetrical inflation chambers
- 4.Heavy duty 400D cover
- 5.One size fit all adult size
- 6.Available in Hammar/UML/china inflation
- 7.Crotch strap added for safe
- 8.SOLAS approval lifejacket light optional
- 9.Waist adjusters
- 10.Velcro tape easy for releasing



气胀式救生衣

INFLATABLE LIFE JACKET

RSY-275S



充气救生衣双气囊设计符合根据经MSC 200(80)和MSC 207(81)修订的MSC 81(70)的SOLAS 2010法规。救生衣穿着方便又舒适。成人通用的尺寸，适合最小体重为43公斤，最大胸围为1750毫米的所有人群

- 1.275N双气囊SOLAS 救生衣
- 2.适合绝大多数的保温服使用
- 3.在两个对称的气囊上使用2个60克的二氧化碳小气瓶
- 4.高质量400D 的外包布
- 5.适合所有成人穿着
- 6.可选择哈马/UML/国产的激发装置
- 7.添加了跨带来保证安全
8. SOLAS 认可的衣灯可供选择
- 9.可调节的腰部安全带
- 10.魔术贴设计气囊更容易释放



The inflatable lifejacket Twin Chamber is designed to meet the SOLAS 2010 regulations according to MSC 81(70) as amended by MSC 200(80) and MSC 207(81). The lifejacket is both easy to don and comfortable. It is a universal adult size suitable from a minimum weight of 43kg and will fit a maximum chest size of 1750mm.

- 1.275N Twin chamber SOLAS approved lifejacket
- 2.Suitable for use with most Immersion and abandonment suits
- 3.Uses 2 x 60g cylinders on symmetrical inflation chambers
- 4.Heavy duty 400D cover
- 5.One size fit all adult size
- 6.Available in Hammar/UML/china inflation
- 7.Crotch strap added for safe
- 8.SOLAS approval lifejacket light optional.
- 9.Waist adjusters
- 10.Velcro tape easy for releasing.



气胀式救生衣

INFLATABLE LIFE JACKET

RONGGUI

RSY-150BD



- ◆ 气室: 单气室
 - ◆ 浮力: ≥ 150牛
 - ◆ 重量: ≤ 1千克
 - ◆ 充气时间: ≤ 5秒
 - ◆ 漂浮时间: ≥ 24小时
 - ◆ 充气方式: 自动和手动
 - ◆ 24小时后浮力损失: ≤ 5%
 - ◆ 使用环境温度: -30°C~65°C
- ◆ Chamber: Single
 - ◆ Buoyancy: ≥ 150N
 - ◆ Weight: ≤ 1 Kg
 - ◆ Inflation time: ≤ 5seconds
 - ◆ Float duration: ≥ 24 hours
 - ◆ Inflation method: Automatic&Manual
 - ◆ Buoyancy loss after 24h: ≤ 5%
 - ◆ Ambient temperature for use: -30°C~+65°C



RSY-150BS



- ◆ 气室: 单气室
 - ◆ 浮力: ≥ 150牛
 - ◆ 重量: ≤ 1千克
 - ◆ 充气时间: ≤ 5秒
 - ◆ 漂浮时间: ≥ 24小时
 - ◆ 设计: 带独立胯带
 - ◆ 充气方式: 自动和手动
 - ◆ 24小时后浮力损失: ≤ 5%
 - ◆ 使用环境温度: -30°C~65°C
- ◆ Chamber: Single
 - ◆ Buoyancy: ≥ 150N
 - ◆ Weight: ≤ 1 Kg
 - ◆ Inflation time: ≤ 5seconds
 - ◆ Float duration: ≥ 24 hours
 - ◆ Design: Crotch strap
 - ◆ Inflation method: Automatic&Manual
 - ◆ Buoyancy loss after 24h: ≤ 5%
 - ◆ Ambient temperature for use: -30°C~+65°C



RSY-150TS-1



- ◆ 气室: 双气室
 - ◆ 浮力: ≥ 150牛
 - ◆ 重量: ≤ 1千克
 - ◆ 充气时间: ≤ 5秒
 - ◆ 漂浮时间: ≥ 24小时
 - ◆ 充气方式: 自动和手动
 - ◆ 24小时后浮力损失: ≤ 5%
 - ◆ 使用环境温度: -30°C~65°C
- ◆ Chamber: Twin
 - ◆ Buoyancy: ≥ 150N
 - ◆ Weight: ≤ 1 Kg
 - ◆ Inflation time: ≤ 5seconds
 - ◆ Float duration: ≥ 24 hours
 - ◆ Inflation method: Automatic&Manual
 - ◆ Buoyancy loss after 24h: ≤ 5%
 - ◆ Ambient temperature for use: -30°C~+65°C



气胀式救生衣

INFLATABLE LIFE JACKET

充气腰带 Inflatable lifebuoy

- ◆ 浮力: > 100牛
 - ◆ 重量: < 0.6kg
 - ◆ 充气时间: < 5秒
 - ◆ 漂浮时间: ≥ 24小时
 - ◆ 24小时后浮力损失: ≤ 5%
- ◆ Buoyancy: > 100N
 - ◆ Weight: < 0.6kg
 - ◆ Inflation time: less than 5seconds
 - ◆ Float duration: more than 24 hours
 - ◆ Buoyancy loss after 24h: less than 5%



RSY-150系列/RSY-150 Series

外包布可选颜色 Optional color for cover

红色 Red	蓝色 Blue	黄色 Yellow	黑色 Black	银色 Silver	迷彩 Camouflage
-----------	------------	--------------	-------------	--------------	------------------



RSNH-1

- ◆ 尺寸: 320*550*80cm
 - ◆ 浮力: ≥ 100牛
 - ◆ 适合体重: 43-140kg
- ◆ Size: 320*550*80cm
 - ◆ Buoyancy: ≥ 100N
 - ◆ Suitable Weight: 43-140kg





RSCY-A4/A5



柔软的衣领和可调节的安全带，方便穿着。面料选用高强度涤纶牛津，浮力材料为EPE闭孔泡沫。它配有救生衣灯，口哨，伙伴绳和提拉环。符合人体工程学的设计，具有许多出色的设计功能，可实现最大的安全性和性能。

Soft collar and adjustable belt for easy donning fabric select high-strength polyester oxford, buoyancy material is EPE closed-cell foam It is equipped with lifejacket light,whistle,buddy line and lifting loop.Ergonomically tailored for maximum safety and performance with a host of outstanding design features

- ◆ CCS和EC 认可产品
- ◆ 最小浮力150牛
- ◆ 背心式
- ◆ 良好的水中性能
- ◆ 带有口哨，伙伴绳和提拉环
- ◆ 方便穿着
- ◆ 高亮度的面料，浮力芯材和织带都是业界认可的
- ◆ 24小时的浮力损失小于5%
- ◆ 有SOLAS认可的应急衣灯可选择

- ◆ CCS and EC approved
- ◆ Minimum buoyancy of 150N
- ◆ Vest type
- ◆ Good in-water performance
- ◆ Comes with Whistle ,buddy line,and lifting loop in a contrasting color
- ◆ Easy for donning
- ◆ High visibility fabric, foam and webbing are a proven success in the field
- ◆ Buoyancy loss will less than 5% after 24 hours
- ◆ SOLAS approved emergency light alternative

RSCY-A3/A9



- ◆ 最小浮力 275牛/150牛
- ◆ 可以折叠
- ◆ 有效利用存储空间，比普通款式体积更小
- ◆ 良好的水中性能
- ◆ 带有口哨，伙伴绳 和提拉环
- ◆ 方便穿着
- ◆ 24小时的浮力损失小于5%
- ◆ 有SOLAS认可的应急衣灯可选择

- ◆ Minimum buoyancy of 275N/150N.
- ◆ Fold type
- ◆ Efficient use of storage space, smaller than normal one.
- ◆ Good in-water performance.
- ◆ Comes with Whistle ,buddy line, and lifting loop.
- ◆ Easy for donning.
- ◆ Buoyancy loss will less than 5% after 24 hours.
- ◆ SOLAS approved emergency light alternative.



RSYY-1



- ◆ 最小浮力65牛
- ◆ 扼式救生衣
- ◆ 良好的水中性能
- ◆ 带有口哨，伙伴绳 和提拉环
- ◆ 轻松快速穿着
- ◆ 高亮度的面料，浮力芯材和织带都是业界认可的
- ◆ 24小时的浮力损失小于5%
- ◆ 有SOLAS认可的应急衣灯可选择

- ◆ Minimum Buoyancy of 65N
- ◆ Yoke Vest type
- ◆ Good in-water performance
- ◆ Comes with Whistle ,buddy line,and lifting loop in a contrasting color
- ◆ Quick and Easy for donning
- ◆ High visibility fabric, foam and webbing are a proven success in the field
- ◆ Buoyancy loss will less than 5% after 24 hours
- ◆ SOLAS approved emergency light alternative



救生衣

LIFE JACKET

RSCY-A6



- ◆ 最小浮力 150牛
- ◆ 背心式
- ◆ 良好的水中性能
- ◆ 腰带设计可适合胸围1750mm的人群
- ◆ 方便穿着
- ◆ 高亮度的面料，浮力芯材和织带都是业界认可的
- ◆ 24小时的浮力损失小于5%
- ◆ 有SOLAS认可的应急衣灯可选择
- ◆ Minimum buoyancy of 150N
- ◆ Vest type
- ◆ Good in-water performance
- ◆ Waist belt designed to fit chest girth of 1750mm
- ◆ Easy for donning
- ◆ Highly visible colour with solas approved retro reflective tape
- ◆ Buoyancy loss will less than 5% after 24 hours
- ◆ SOLAS approved emergency light alternative



RSCY-A7



- ◆ 最小浮力 150牛
- ◆ 轭式救生衣
- ◆ 良好的水中性能
- ◆ 带有口哨，伙伴绳 和提拉环
- ◆ 方便穿着
- ◆ 高亮度的面料，浮力芯材和织带都是业界认可的
- ◆ 24小时的浮力损失小于5%
- ◆ 有SOLAS认可的应急衣灯可选择
- ◆ Minimum buoyancy of 150N
- ◆ Yoke Vest type
- ◆ Good in-water performance
- ◆ Comes with Whistle ,buddy line,and lifting loop in a contrasting color
- ◆ Easy for donning
- ◆ High visibility fabric, foam and webbing are a proven success in the field
- ◆ Buoyancy loss will less than 5% after 24 hours
- ◆ SOLAS approved emergency light alternative



RSCY-A8



- ◆ 最小浮力 150牛
- ◆ 轭式救生衣
- ◆ 良好的水中性能
- ◆ 带有口哨，伙伴绳 和提拉环
- ◆ 方便穿着
- ◆ 高亮度的面料，浮力芯材和织带都是业界认可的
- ◆ 24小时的浮力损失小于5%
- ◆ 有SOLAS认可的应急衣灯可选择
- ◆ 腰带设计可适合胸围1750mm的人群
- ◆ Minimum buoyancy of 150N
- ◆ Yoke Vest type
- ◆ Good in-water performance
- ◆ Comes with Whistle ,buddy line,and lifting loop in a contrasting color
- ◆ Easy for donning
- ◆ Highly visible colour with solas approved retro reflective tape
- ◆ Buoyancy loss will less than 5% after 24 hours
- ◆ SOLAS approved emergency light alternative
- ◆ Waist belt designed to fit chest girth of 1750mm



救生衣

LIFE JACKET

RSEY-1



- ◆ 最小浮力75牛
- ◆ 轭式救生衣
- ◆ 良好的水中性能
- ◆ 带有口哨，伙伴绳和提拉环
- ◆ 轻松快速穿着
- ◆ 高亮度的面料，浮力芯材和织带都是业界认可的
- ◆ 24小时的浮力损失小于5%
- ◆ 有SOLAS认可的应急衣灯可选择
- ◆ Minimum buoyancy of 75N
- ◆ Yoke Vest type
- ◆ Good in-water performance
- ◆ Comes with Whistle ,buddy line,and lifting loop in a contrasting color
- ◆ Quick and Easy for donning
- ◆ High visibility fabric, foam and webbing are a proven success in the field
- ◆ Buoyancy loss will less than 5% after 24 hours
- ◆ SOLAS approved emergency light alternative



RSEY-2



- ◆ 最小浮力88牛
- ◆ 轭式救生衣
- ◆ 良好的水中性能
- ◆ 带有口哨，伙伴绳 和提拉环
- ◆ 轻松快速穿着
- ◆ 高亮度的面料，浮力芯材和织带都是业界认可的
- ◆ 24小时的浮力损失小于5%
- ◆ 有SOLAS认可的应急衣灯可选择
- ◆ Minimum Buoyancy of 88N
- ◆ Yoke Vest type
- ◆ Good in-water performance
- ◆ Comes with Whistle ,buddy line,and lifting loop in a contrasting color
- ◆ Quick and Easy for donning
- ◆ High visibility fabric, foam and webbing are a proven success in the field
- ◆ Buoyancy loss will less than 5% after 24 hours
- ◆ SOLAS approved emergency light alternative



RSY-150C



- ◆ 气室：双气囊
- ◆ 浮力：≥150牛
- ◆ 重量：≤1.5千克
- ◆ 充气时间：≤5秒
- ◆ 漂浮时间：≥24小时
- ◆ 设计：带独立胯带
- ◆ 充气方式：自动和手动
- ◆ 24小时后浮力损失：≤5%
- ◆ 使用环境温度：-30℃~65℃
- ◆ Chamber:Twin chamber
- ◆ Buoyancy: ≥150N
- ◆ Weight: ≤1.5 Kg
- ◆ Inflation time: ≤5seconds
- ◆ Float duration: ≥24 hours
- ◆ Design:Crotch strap
- ◆ Inflation method: Automatic&Manual
- ◆ Buoyancy loss after 24h: ≤5%
- ◆ Ambient temperature for use: -30℃~+65℃



救生衣

LIFE JACKET

RONGGUI

RSGY-1

- ◆ 最小浮力 75牛
- ◆ 背心式救生衣
- ◆ 良好的水中性能
- ◆ 轻松快速穿着
- ◆ 高亮度的面料，浮力芯材和织带都是业界认可的
- ◆ 有SOLAS认可的应急衣灯可选择

- ◆ Minimum buoyancy of 75N
- ◆ Work Vest type
- ◆ Good in-water performance
- ◆ Quick and Easy for donning
- ◆ High visibility fabric, foam and webbing are a proven success in the field
- ◆ SOLAS approved emergency light alternative



PVC工作救生衣

PVC Work life jacket

- ◆ 浮力材质：NBR泡沫
- ◆ 浮力：≥150牛
- ◆ 重量≤0.5千克
- ◆ 由三个独立配件组成，单个尺寸：32*23*4.5cm

- ◆ Buoyancy Material: NBR foam
- ◆ Buoyancy: ≥150N
- ◆ Weight: ≤0.5kg
- ◆ Three separate parts Each size: 32*23*4.5cm



RSGY-4

- ◆ 最小浮力 75牛
- ◆ 背心式救生衣
- ◆ 柔软的泡沫，穿着更舒适
- ◆ 轻松快速穿着
- ◆ 高亮度的面料，浮力芯材和织带都是业界认可的
- ◆ 有SOLAS认可的应急衣灯可选择

- ◆ Minimum buoyancy of 75N
- ◆ Work Vest type
- ◆ Soft foam to make worker comfortable
- ◆ Quick and Easy for donning
- ◆ High visibility fabric, foam and webbing are a proven success in the field
- ◆ SOLAS approved emergency light alternative



休闲救生衣

LEISURE LIFEJACKET

- ◆ 最小浮力100牛
- ◆ 亮色的撞色设计，正面配两个口袋
- ◆ 背心式救生衣，快速穿着
- ◆ 有SOLAS认证认可的应急衣灯可选择

- ◆ Minimum buoyancy of 100N
- ◆ Bright color contrast design,two pockets on the front
- ◆ Work vest type,quickly donning
- ◆ SOLAS approved emergency light alternative



- ◆ 最小浮力100牛
- ◆ 背心式救生衣，快速穿着
- ◆ 良好的水中性能
- ◆ 有SOLAS认证认可的应急衣灯可选择

- ◆ Minimum buoyancy of 75N
- ◆ Work vest type,quickly donning
- ◆ Good in-water performance
- ◆ SOLAS approved emergency light alternative



- ◆ 外层材料：NBR橡胶
- ◆ 内里材料：EPE泡沫
- ◆ 带拉链、插扣和口哨
- ◆ 有SOLAS认可的反光带

- ◆ Material outside:NBR Rubber
- ◆ Material inside:EPE foam
- ◆ With zipper&buckle&whistle
- ◆ With SOLAS reflective tape



救生衣灯

LIFEJACKET LIGHT

RONGGUI

RSYD-A/RSYD-A1



- ◆ 符合SOLAS1974及其最新修正案
- ◆ 手动开关
- ◆ 光源：LED（闪光）
- ◆ 发光时间：≥8小时
- ◆ 发光强度：≥0.75cd
- ◆ 电源：锂电池

- ◆ Comply with SOLAS 1974 and latest amendment
- ◆ Manual switch
- ◆ Illuminant: LED (Flash)
- ◆ Flare time: more than 8 hours
- ◆ Luminous Intensity: more than 0.75cd
- ◆ Battery: Lithium battery



RSYD-A2



- ◆ 符合SOLAS1974及其最新修正案
- ◆ 自动水触点，手动开关仅能关闭光源
- ◆ 光源：LED（闪烁）
- ◆ 发光时间：≥8小时
- ◆ 发光强度：≥0.75cd
- ◆ 电源：锂电池

- ◆ Comply with SOLAS 1974 and latest amendment
- ◆ Manual switch and water automatic
- ◆ Illuminant: LED (Flash)
- ◆ Flare time: more than 8 hours
- ◆ Luminous Intensity: more than 0.75cd
- ◆ Battery: Lithium battery CR123A



RSYD-A3



- ◆ 符合SOLAS1974及其最新修正案
- ◆ 具备自动水触开启和手动开关闭
- ◆ 光源：LED（闪烁）
- ◆ 发光时间：≥8小时
- ◆ 发光强度：≥0.75cd
- ◆ 电源：锂电池

- ◆ Comply with SOLAS 1974 and latest amendment
- ◆ Manual switch and water automatic
- ◆ Illuminant: LED (Flash)
- ◆ Flare time: more than 8 hours
- ◆ Luminous Intensity: more than 0.75cd
- ◆ Battery: Lithium battery CR123A



RSYD-EX



- ◆ 符合SOLAS1974及其最新修正案
- ◆ 具备自动水触开启和手动开关闭
- ◆ 光源：LED（闪烁）
- ◆ 发光时间：≥8小时
- ◆ 发光强度：≥0.75cd
- ◆ 电源：锂电池
- ◆ 具有防爆功能

- ◆ Comply with SOLAS 1974 and latest amendment
- ◆ Manual switch and water automatic
- ◆ Illuminant: LED (Flash)
- ◆ Flare time: more than 8 hours
- ◆ Luminous Intensity: more than 0.75cd
- ◆ Battery: Lithium battery CR123A
- ◆ Have explosion-proof function



AIS个人搜救报位信标 (RS-MOB-1)

Professional Man Over Board Device Incorporating Both AIS And Position Beacon (RS-MOB-1)

产品概述

该产品是一款为个人定位应用开发的信标，正常情况下可用于人员报位，紧急情况下可用于求救报警的无线电设备，提供个人落水状况下的AIS位置信息标识，保障个人人身安全。



Product Overview

The product is a beacon developed for personal positioning applications. It can be used for personnel reporting position under normal conditions, and can be used as a radio device for distress alarms in emergency situations. It provides AIS location information identification under personal falling water conditions to ensure personal safety.

设备特点



AIS发射功能
AIS Launch function




北斗/GPS双模定位功能
Beidou/GPS dual-mode positioning function



具备报位和报警功能
With reporting position and alarm functions



内置救生衣，免展开，免操作
Built in lifejacket, no deployment, no operation



5年电池寿命
5 years battery life



超长工作时间
Long work time



落水自动激活
Automatic activation while falling water



超高防水
High performance waterproof

充气救生衣配件

INFLATABLE LIFEJACKET ACCESSORIES



充气救生衣保护罩

1. 保护充气救生衣不受热气流, 火花, 火焰, 化学品危害
2. 易于穿戴, 简单的设计使用起来方便
3. 轻型的面料
4. 不影响内里救生衣的操作, 水中性能

Inflatable Lifejacket Protective Work Cover

Provides shielding against heat, sparks, flame, soft chemicals
Easy fit/Simple to use design
Lightweight fabric
Does not affect the operation, behaviour & water performance of the protected lifejacket



手动激发装置
Manual inflation device



自动激发装置
Water automatic inflation device

24克小气瓶
24 grams

33克小气瓶
33 grams

38克小气瓶
38 grams

55克小气瓶
55 grams

60克小气瓶
60 grams



UML 激发装置
UML automatic inflation device



UML 激发装置带视窗
UML automatic inflation device with windows



口哨
Whistle
EN ISO 12402-8



反光带 5CM*50M
CCS/EC 认证
Retro reflective tape 5CM*50M
CCS/EC approval

工作服 COVERALL



连体式工作服

- ◆ 面料: 棉类混纺
 - ◆ 衣服配有反光带、口袋
- ### Working Coverall Suit
- ◆ Fabric: Cotton blend
 - ◆ Suit with reflective tape pockets



分体式工作服

- ◆ 面料: 棉类混纺
 - ◆ 衣服配有口袋并具有防静电功能
- ### Split Work Suit
- ◆ Fabric: Cotton blend
 - ◆ Suit with pockets, and it has anti-static function



安全反光背心

- ◆ 面料材质: 120gsm 100%涤纶面料
- ◆ 颜色: 橙色/绿色
- ◆ 用途: 建筑、公用、学校路口、停车场、交通等



Reflective safety vest

- ◆ Fabric Material: 120gsm 100% Polyester fabric
- ◆ Color: Orange/Green
- ◆ Application: Construction, utility school crossing, parking lots, traffic and so on

救生圈 Lifebuoy

- ◆型号: RS5555-I/RS5555-II
- ◆重量: ≥2.5kg/4.3kg
- ◆颜色: 橙色
- ◆外壳材质: HDPE
- ◆填充物: 聚氨酯
- ◆外径: 720mm±20mm
- ◆内径: 440mm±20mm
- ◆ Model Number: RS5555-I/RS5555-II
- ◆ Weight: 2.5kg/4.3kg
- ◆ Color: Orange
- ◆ The Shell Material: HDPE
- ◆ Filler: rigid polyurethane
- ◆ The Out Diameter: 720mm±20mm
- ◆ The Inside Diameter: 440mm±20mm



救生圈浮索 Lifebuoy Floating lifeline

绳子尺寸: 直径8mm*30米长
绳子材质: 聚丙烯
Rope size: φ8mm*30m length
Rope material: Polypropylene



救生圈浮索 Lifebuoy Floating lifeline

- 1. 绳子直径: 8mm
- 2. 绳长: 30米&50米
- 3. 材质: 聚丙烯
- 4. 安装在救生圈上
- 1. Rope diameter: 8mm
- 2. Length: 30meter & 50meter
- 3. Material: Polypropylene
- 4. fixed on lifebuoy

救生圈存放箱 Lifebuoy storage box

材质: 玻璃钢
尺寸: 直径92cm, 高19cm
重量: 16KG
Material: Glass reinforced plastics
Size: Diameter: 92cm, Height: 19cm
Weight: 16 kg



救生圈快速释放装置 Lifebuoy quick release device

- ◆ 材质: 玻璃钢
- ◆ 一套两个, 左右舷各一个
- ◆ Material: Fiber Reinforce Plastic
- ◆ One set contain two pieces, each board include one



救生圈支架 Lifebuoy bracket

- 1. 材质: 铁 表面喷塑/不锈钢
- 2. 宽度: 58厘米
- 3. 高度: 67厘米
- 4. Y型, 适合2.5kg 和 4.3kg 救生圈

1. Material: Iron covered with spray paint/Stainless steel
2. Width: 58cm
3. Height: 67cm
4. Y type, suitable to both 2.5kgs and 4.3kgs lifebuoy



救生圈灯

LIFEBUOY LIGHT

RONGGUI



RSQD-2



- ◆符合SOLAS/MED在2小时内发光强度不小于2.0cd使用1节, 1号电池

Lifebuoy Light SOLAS/MED approved More than 2.0 cd in all directions of the upper hemisphere for a period of at least 2h
To be used with 1 unit #1 alkaline battery



RSQD-2



- ◆符合SOLAS/MED在2小时内发光强度不小于2.0cd使用1节, 1号电池

Lifebuoy Light SOLAS/MED approved More than 2.0 cd in all directions of the upper hemisphere for a period of at least 2h
To be used with 1 unit #1 alkaline battery



RSQD-1



- | | |
|-------------------|---|
| ◆符合SOLAS1974及其修正案 | ◆Comply with SOLAS 1974 and its amendment |
| ◆工作时间: ≥2小时 | ◆Working Time: ≥2 hours |
| ◆光源: LED | ◆Illuminant: LED |
| ◆发光强度: ≥2.0cd | ◆Luminous intensity: >2 cd |
| ◆闪光频率: 50-70次/分钟 | ◆Flash Frequency: 50-70 times/min |
| ◆电源: 锂电池 | ◆Battery: Lithium battery |
| ◆有效期: 3年 | ◆Validity: 3 years |

救生圈灯

LIFEBUOY LIGHT



RSQD-EX



- | | |
|-------------------|--|
| ◆符合SOLAS1974及其修正案 | ◆ Comply with SOLAS 1974 and amendment |
| ◆工作时间: ≥2小时 | ◆ Flare time: more than 2 hours |
| ◆光源: LED | ◆ Illuminant: LED |
| ◆发光强度: ≥2.0cd | ◆ Luminous Intensity: more than 2.0 cd |
| ◆闪光频率: 50-70次/分钟 | ◆ Flash Frequency: 50-70 times/minute |
| ◆电源: 锂电池 | ◆ Battery: Lithium battery |
| ◆有效期: 3年 | ◆ Validity: 3 years |

消防员战斗服

FIREMAN SUIT

消防员隔热服是一款两件式消防服，它是由四层结构组成的。面料是诺梅克斯材质，一种间位芳纶，第二层是防水透气膜。第三层是间位芳族聚酰胺/对位芳族聚酰胺毡制的隔热层，第四层是芳纶衬里。上衣具有立领，松紧袖口，配有拉链和门襟，可以很好的保护消防员。这条裤子有宽阔的松紧带，调节带和快速穿脱的插扣。头盔，手套，靴子可供选择。

The Fireman Suit is a two-piece garment with a four-layer construction. The outer shell is Nomex one type of Meta-aramid. The second layer is a waterproof breathable membrane. The third layer is an meta-aramid/para-aramid felted thermal barrier and the fourth layer is a aramid lining. The jacket has a stand up collar, elasticated cuffs, and is closed by a zip covered by an overlapping front with touch and close fastening to the front and collar. The trousers have wide elasticated braces with adjusters and quick-release buckles. Optional helmet, gloves, boots can be fitted as well.

- ◆ 主要材料:耐燃性织物
- ◆ 颜色:深蓝色
- ◆ 面料层:1.阻燃层2.防水层3.隔热层4.舒适层
- ◆ 续焰时间:≤2 s
- ◆ Main Material: Flame resistant fabric
- ◆ Color:Dark blue
- ◆ Layer:4 layers
- Flame Resistant Fabric:Cross grain
- Waterproof layer:Flame felt PTEE coated
- Thermal Proof Layer:Aramid
- Comfort Layer:Tabby
- ◆ After Flame Time:≤2s



腰带/Fireman Belt

- ◆ 尺寸/Size: 140*76mm
- ◆ 材质/Material: 涤纶加强丝/Polyester
- ◆ 属件/Parts: 铁镀锌/Galvanized iron



耐火安全绳/Fireproof Lifeline

- ◆ 材质/Material: Wire rope
- ◆ 尺寸/Size: φ4mm*30M
- ◆ 破断负荷/Break Strength: 3.5KN



消防头盔
Fireman Helmet



消防套靴
Fireman Boots



自给正压式空气呼吸器

Self-Contained Positive Pressure Air Breathing Apparatus

RHZK6-S/RHZK6.8-S



符合SOLAS1974及其修正案
适用环境: -30°C ~ 60°C、相对湿度0 ~ 100%、
大气压力70Kpa ~ 125Kpa
主要组成: 高压气瓶、气瓶阀、减压器、快速接头、
供气阀、全面罩、电子压力报警器、背具等

- ◆ 开放式背板, 通风良好, 重量轻
- ◆ 易于操作和可调式气瓶带
- ◆ 舒适易用, 在空气中呼吸阻力低
- ◆ 面罩和供气阀紧密连接
- ◆ 电子压力表提供声光报警功能
- ◆ 可选配面罩指示灯

Comply with SOLAS 1974, as amended
Applicable environment: 30 °C ~ 60 °C, relative humidity 0 ~ 100%,
atmospheric pressure: 70 kpa to 125 kpa
Main components: High-pressure cylinders, cylinder valve, pressure reducer, quick connectors, supply valve, full face mask, electronic pressure alarm, backboard, etc.

- ◆ Open back plate for good ventilation and low weight
- ◆ Easy to handle and adjustable cylinder strap
- ◆ Comfortable and easy to use, with low breathing resistance on and off air
- ◆ Mask and demand valve in a compact connection
- ◆ Electrical pressure gauge supply audible alarm and visual funtion
- ◆ HUD is optional

型号 Model	气瓶材料 Cylinder Material	气瓶容积 Cylinder Volume	储气量 Gas Storage Capacity	工作时间 Working Time	工作压力 Working Pressure	认证 Approval
RHZK6-S	Alloy steel	6L	1800L	55-60min	300bar	CCS/EC
RHZK6.8-S	Carbon fiber composite	6.8L	2040L	60-65min	300bar	CCS/EC

空气呼吸器配件

SCBA Accessories



电子压力表
Electronic Pressure Gauge



电子压力表-数显
Electronic Pressure Gauge-Digital Display



压力表和报警哨
Pressure Gauge and Alarm Device



面罩指示灯
HUD



骨传导通信单元
Bone Conduction Communication Unit



便携式双向无线电
Portable Walkie Talkie



面罩
Mask



供气阀
Demand Valve



减压器组件
Pressure Reducer Unit

空气呼吸器配件

SCBA Accessories

瓶头阀 Cylinder Valve

No.	1	2	3
Thread Specification	M10*1	M18*1.5	G5/8



气瓶压力检测仪 Cylinder Pressure Tester

接口螺纹 Connection Thread	压力表 Pressure Gauge
G5/8	0~400bar



气瓶组 Cylinder Assembly

型号 Type	气瓶材料 Cylinder Material	气瓶容积 Cylinder Volume	储气量 Gas Storage Capacity
RHZK-6	合金钢 Alloy steel	6L	1800L
RHZK-6.8	碳纤维 Carbon fiber	6.8L	2040L



紧急逃生呼吸装置

EMERGENCY ESCAPE BREATHING DEVICES

KONGGUI

THRS-15

符合SOLAS1974及其修正案
供人员紧急逃生时使用, 是对其呼吸器官进行保护
的高性能个人防护装备
工作原理: 将气瓶内的高压气体减压成0.6-0.9Mpa
的中压气体, 流到头罩内供人体呼吸使用

- ◆用于从任何密闭空间紧急逃生
- ◆快速的送风系统
- ◆压缩呼吸空气技术
- ◆易于充气, 无需适配器

Comply with SOLAS 1974, as amended
Use for people when emergency escape, it is a high-
performance personal respiratory protective equip-
ment to protect them
Working Principle: Reduce the high pressure gas to
medium pressure gas into 0.6~0.9 Mpa in the cylinder,
flow to hood for human respiratory


- ◆Used for emergency escape from any confined spaces
- ◆Fast air supply system
- ◆Compressed breathing air technology
- ◆Easy to refill cylinder, no adaptor required



头罩/Hood

瓶头阀/Cylinder Valve

瓶口螺纹规格: M18x1.5
压力表: 0-30Mpa
Thread Specifications: M18x1.5
Pressure Gauge: 0-30Mpa

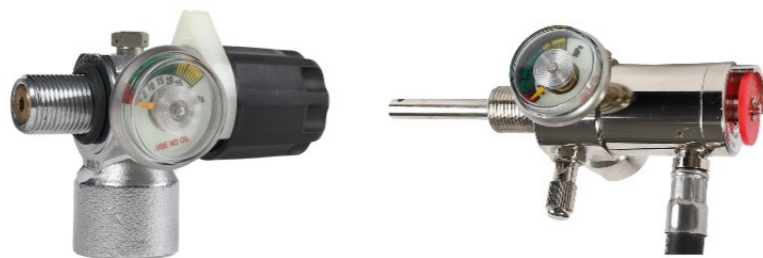

消防员装备配件

FIREMAN OUTFIT ACCESSORIES



消防头盔
Fireman Helmet



消防手套
Fireman Gloves



消防套靴
Fireman Boots



消防员斧
Fireman Axe

尺寸/Size: 265*155mm
塑胶柄长度/Rubber Handle Length: 151mm



防爆手电筒
电池: 6节1号干电池
材质: 铝合金外壳
光源: 集光电珠 7.2V 0.5A
光照强度: 距离10米130LX

Explosion-proof lights
Battery: 6x D-Cell batteries
Material: Aluminum alloy shell
Light Source: Photoelectric beads 7.2V 0.5A
Light Intensity: 10 meters 130LX



防爆手电筒
品牌: 狼牌
防爆等级: IP67

Explosion-proof lights
Brand Name: WOLF
Explosion-proof Grade: IP67



耐火安全绳(麻绳)
长度: ≥30米 直径: 4毫米
材质: 外: 麻绳 内: 钢丝绳
破断负荷3.5千牛
Fireproof Lifeline(Hemp rope)
Length: ≥30M Diameter: 4mm
Material: outside: Hemp
Rope Inside: Wire rope
Break Strength 3.5KN



消防员装备箱
Fireman outfit box
材质: 玻璃钢
Material: FRP





消防水带 Fire Hose
直径: 40/50/65毫米
Diameter: 40/50/65mm

水带接口 Fire Hose Coupling
直径: 40/50/65毫米
类型: 中岛式, 德式, 美式, 英式
Diameter: 40/50/65mm
Type: Nakajima Type, Storz Type, ANSI Type, JOHN Type



消防水枪 Fire Hose Nozzle

- ◆直径: 40/50/65毫米
- ◆类型: 中岛式, 德式, 美式, 英式
- ◆Diameter: 40/50/65mm
- ◆Type: Nakajima Type, Storz Type, ANSI Type, JOHN Type



扳手 Spanner
◆直径: 40/50/65毫米
◆Diameter: 40/50/65mm



国际通岸接头
International Shore Connection
直径: 40/50/65毫米
Diameter: 40/50/65mm



闷盖 Cap
直径: 40/50/65毫米
Diameter: 40/50/65mm



消防栓 Fire Hydrant
直径: 40/50/65毫米
Diameter: 40/50/65mm



灭火毯 Fire Blanket
材质: 玻璃纤维
尺寸: 120*180厘米/150*200厘米/180*180厘米
Material: Fibre glass
Size: 120*180CM/150*200CM/180*180CM



消防桶 Fire Bucket
材质: 铁
Material: Iron



长柄消防斧 Long Handle Fire Axe
尺寸: 934*156毫米
Size: 934*156mm

手提式泡沫喷枪装置
Portable Foam Applicators
工作压力: 0.25-0.5Mpa
容积 (桶): 20L
喷射距离: ≥20米
材质: 不锈钢
Working Pressure: 0.25-0.5Mpa
Volume (bucket): 20L
Jet Distance: ≥20meter
Material: Stainless steel



A型抛投式气胀救生筏 Type A Throw-over Type Inflatable Liferaft

适用于国际航行船舶上使用

Suit for the vessels sailing on the sea

SOLAS 1974/1996,LSA,MSC.81(70),MSC218(82)



型号/type	A6		A10		A12		A15/16		A20		A25		A30	
核定人员 Rated person	6		10		12		15/16		20		25		30	
筏外形 Physical forms	正八边形 Regular octagon						正十二边形 Regular twelve-side				长八边形 Long eight-side			
长/Length(mm)	2160		2730		2935		3405		4280		4700		5535	
宽/Width(mm)	2160		2730		2935		3405		3080		3450		3380	
高/Height(mm)	1350		1450		1450		1500		1650		1800		1800	
筏壳 Canister Pack(mm)	A pack	B pack	A pack	B pack	A pack	B pack	A pack	B pack	A pack	B pack	A pack	B pack	A pack	B pack
	Φ570 x1080	Φ570 x1080	Φ610 x1100	Φ570 x1080	Φ610 x1100	Φ570 x1080	Φ685 x1150	Φ610 x1100	Φ720 x1300	Φ685 x1150	Φ730 x1430	Φ720 x1300	Φ730 x1430	Φ720 x1300
重量/Weight ≤kg	75	63	98	73	110	78	130/130	95/95	155	110	183	128	210	145
高抛筏 High-Height≤ kg	76	64	100	75	112	80	133/133	98/98	158	113	187	132	215	150

D型可吊式气胀救生筏 Type D Davit-launched Type Inflatable Liferaft

适用于国际航行船舶上使用

Suit for the vessels sailing on the sea



型号 Type	D15	D16	D20	D25
核定人员 Rated person	15	16	20	25
筏外形 Physical forms	正十边形 Regular ten-side			长十二边形 Long twelve-side
长/Length(mm)	3400	3400	3825	4530
宽/Width(mm)	3400	3400	3825	3730
高/Height(mm)	1750	1750	1700	1500

K型开敞式两面可用救生筏 Type K Open Reversible Inflatable Liferaft

适用于国际航行船舶上使用

Suit for the vessels sailing on the sea

SOLAS 1974/1996,LSA,MSC.81(70),MSC218(82)



型号 Type	核定人员 Rated person	筏外形 Physical forms	长/Length (mm)	宽/Width (mm)	高/Height (mm)	筏壳 Canister Pack (mm)	筏壳长度 Canister Length (mm)	重量/Weight (Kg)
K50	50	正十二边形	5900	5900	860	730	1495	≤180
K65	65	正十六边形	6520	6520	920	730	1495	≤210

ASR型抛投式自扶正气胀救生筏 Type ASR Throw-over & Self-Righting Inflatable Liferaft

适用于国际航行船舶上使用

Suit for the vessels sailing on the sea

SOLAS 1974/1996,LSA,MSC.81(70),MSC218(82)



型号/type	ASR6	ASR10	ASR12	ASR15/16	ASR20	ASR25	ASR30	ASR37
核定人员 Rated person	6	10	12	15/16	20	25	30	37
筏外形 Physical forms	长八边形 Long eight-side							
长/Length(mm)	2735	3410	3815	4220	4750	5315	5760	6490
宽/Width(mm)	1745	2210	2345	2730	2950	3225	3505	3750
高/Height(mm)	1400	1500	1640	1875	1950	2150	2300	2450

救生食品和急救药包

Survival Food and First Aid Kit



救生食品

Survival Food rations
KL-99/KL-99F
规格: 0.5kg
Specification: 0.5kg



应急饮用水

Emergency drinking water

DS-97 / DS-97F
规格: 5x100ml/4x125ml
Specification:
5x100ml/4x125ml



符合标准ISO 18813:2006, SOLAS 74 as amended,
IMO MSC 48(66), MSC.218 (82), LSA Code
COMPLY WITH ISO 18813:2006, SOLAS 74 as amended,
IMO MSC 48(66), MSC.218 (82), LSA Code as amended



急救药包 / First Aid Kit



- ◆ 装有急救或常用药品及消毒的药棉、绷带等, 供国际国内航行船舶所配备的救生艇、救生筏使用
- ◆ Containing first aid or commonly used medicine and sterilized cotton, bandage, etc, used for lifeboats and liferafts equipped for ships sailing in domestic and overseas

救生筏灯

LIFERAFT LIGHT

RSFD-2



- ◆ 符合SOLAS1974及其修正案
- ◆ 工作时间: ≥12小时
- ◆ 光源: LED (常亮+闪烁)
- ◆ 发光强度:
外灯≥4.3cd
内灯≥0.5cd

- ◆ Comply with SOLAS 1974 and amendment
- ◆ Working Time: More than 12 hours
- ◆ Illuminant: LED (Constant light and flashing)
- ◆ Luminous Intensity:
Outer light: More than 4.3cd
Inner light: More than 0.5cd

RSFD-3



- ◆ 符合SOLAS1974及其修正案
- ◆ 工作时间: ≥12小时
- ◆ 光源: LED (常亮+闪烁)
- ◆ 发光强度:
外灯≥4.3cd
内灯≥0.5cd

- ◆ Comply with SOLAS 1974 and amendment
- ◆ Working Time: More than 12 hours
- ◆ Illuminant: LED (Constant light and flashing)
- ◆ Luminous Intensity:
Outer light: More than 4.3cd
Inner light: More than 0.5cd

RSFD-4



- ◆ 符合SOLAS1974及其修正案
- ◆ 工作时间: ≥12小时
- ◆ 光源: LED (常亮+闪烁)
- ◆ 发光强度:
外灯≥4.3cd
内灯≥0.5cd

- ◆ Comply with SOLAS 1974 and amendment
- ◆ Working Time: More than 12 hours
- ◆ Illuminant: LED (Constant light and flashing)
- ◆ Luminous Intensity:
Outer light: More than 4.3cd
Inner light: More than 0.5cd

救生筏配件

LIFERAFT ACCESSORIES

KONGGOU



可浮小刀
Floating knife

- ◆ 标准/Standard: ISO18813:2006
- ◆ 尺寸/Total Length: 161(毫米)mm



开罐刀
Can opener

- ◆ 标准/Standard: ISO18813:2006
- ◆ 尺寸/Total Length: 61*180(毫米)mm
- ◆ 镀锌/Covered with zinc



钓鱼用具
Fishing kit



浮环
Rescue ring

- ◆ 尺寸(环)/Size(Ring):
直径179mm/ ϕ 179mm
- ◆ 尺寸(绳)/Size(Line):
直径4mm*30米长/
 ϕ 4mm*30M Length



信号镜
Signal mirror



筏用海锚
Sea anchor




可浮划桨
Floating paddle



饮水杯
Drinking vessel

- ◆ 标准/Standard: ISO18813:2006
- ◆ 容量/Volume 125(毫升)ml



水瓢
Bailer

- ◆ 标准/Standard: ISO18813:2006
- ◆ 尺寸/Size 180*125*55(毫米)mm
- ◆ 容量/Capacity: 2L



快速释放阀
Quick release valve



急救夹
First aid clip



急救塞
First aid plug



水密电筒
Waterproof torch

- ◆ 标准/Standard: ISO18813:2006
- ◆ 总长度: 直径62X193毫米
Total Length: ϕ 62*193mm
- ◆ 两节一号干电池/ 2*#1 dry battery



标示管卡
ID tube



救生手册
Survival Manual

- ◆ 标准/Standard: ISO18813:2006



救生筏修理套件
Repair kit for liferaft



补气具
Bellow



修补胶水
Repair mortar

救生筏配件

LIFERAFT ACCESSORIES

救生筏支架、释放器

LIFERAFT BRACKET,HRU

救生筏释放架 Cradle for liferaft

- ◆ 救生筏释放架分为：平抛筏架、斜抛筏架、双层斜抛筏架
- ◆ 材质：碳钢 表面喷塑/不锈钢
- ◆ Category: Throw-over type, Drop type, Double drop type
- ◆ Material: Carbon steel covered with spray paint /Stainless steel



静水压力释放器 Hydrostatic Release Units

- ◆ 符合SOLAS1974及其最新修正案
- ◆ 静水压力释放器是气胀式救生筏快速释放装置，在2~4米水深使救生筏和沉船自动分离
- ◆ 自动释放：在达到一定的水深时，带来的压力迫使弹簧向内变形，带动芯轴向内移动，使卡钩脱离芯轴，达到释放目的
- ◆ 手动释放：只需要拔除释放器链钩上的卡销，便可达到释放目的
- ◆ 材质：所有金属零配件均为不锈钢
- ◆ Comply with SOLAS 1974 and latest amendment
- ◆ Hydrostatic Release Units is a device used for releasing inflatable liferafts fastened on ships, When a ship sinks, HRU operates automatically Within a depth of 2-4m and then liferaft functions properly
- ◆ Automatic Operation: When the ship sinks to the sea ,sea water enters the storage chamber of the unit through its inlet,water pressure on the diaphragm in turn presses the spring ,then force the short shaft moving in ward
- ◆ Manual Operation: Pulling the split pin out and pushing the small link on the connecting link upward
- ◆ Material: Stainless steel




雷达反射器

RADAR REFLECTOR

铝制片状式 Aluminium plates type

- ◆ 材质：铝制插片
- ◆ 雷达回波：≥40 平方米
- ◆ 尺寸：12/16/18英寸
- ◆ 安装高度：至少高于海平面3.5米

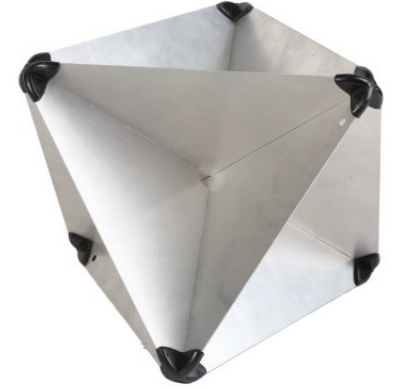

- ◆ Material: Aluminium plates
- ◆ Radar cross section: ≥40m²
- ◆ Size:12/16/18 inch
- ◆ Installing height: at least 3.5 meter above sea level

折叠式 Foldable type

- ◆ 本产品体积小、重量轻、可折叠、储存方便、安装容易、反射性能好、使用寿命长
- ◆ 雷达回波：≥40 平方米
- ◆ 边长：470毫米
- ◆ 安装高度≥2米
- ◆ 使用温度：-35°C~55°C
- ◆ 存放：应存于干燥通风处，避免酸碱类物品接触

- ◆ Small size,light weight,foldable,convenient storage, easy to install, good reflection performance, long service life
- ◆ Radar Cross Section: ≥40m²
- ◆ Side Length: 470mm
- ◆ Operating Temperature: -35°C~55°C
- ◆ Storage: Should be stored in dry ventilated place, avoid acid-base items



绳梯 LADDER

KONGGUI

引航员软梯

- ◆ 适用范围：引航员软梯设计用于从船上上船或下船
- ◆ 符合SOLAS1974及其修正案
- ◆ 踏板材质：榉木
- ◆ 最下面四级：钢衬橡胶踏板
- ◆ 踏板间距：330±20毫米

Pilot Ladder

- ◆ Scope: Pilot Ladders are designed for embarking or disembarking of pilots from vessels
- ◆ Comply with SOLAS 1974 and its amendment
- ◆ Pedal Material: Beech wood
- ◆ The bottom four: Rubber steps with steel lining
- ◆ Pedal pitch: 330 ± 20mm



登乘绳梯

- ◆ 适用范围：设计用于人员沿着船体的垂直部分安全登上救生艇筏，也可供船员上下船舱时使用
- ◆ 符合SOLAS1974及其修正案
- ◆ 踏板材质：榉木
- ◆ 最下面四级：钢衬橡胶踏板
- ◆ 踏板间距：330±20毫米

Embarkation Ladder

- ◆ Scope: Designed for person to safety embarkation of survival craft along a vertical portion of the ship's hull Ladder also available to be used up and down the cabin crew
- ◆ Comply with SOLAS 1974 and its amendment
- ◆ Pedal Material: Beech wood
- ◆ The bottom four: Rubber steps with steel lining
- ◆ Pedal pitch: 330 ± 20mm



绳梯踏板、吸盘 LADDER STEP, MAGNET



短木踏板

- ◆ 材质：榉木
 - ◆ 尺寸：525*115毫米
 - ◆ 厚度：≥25毫米
- Short Step**
- ◆ Material: Beech wood
 - ◆ Size: 525*115mm
 - ◆ Thickness: ≥25mm



止扭踏板

- ◆ 材质：榉木
 - ◆ 尺寸：1800*115毫米
 - ◆ 厚度：≥25毫米
- Stop Twisting Step**
- ◆ Material: Beech wood
 - ◆ Size: 1800*115mm
 - ◆ Thickness: ≥25mm



橡胶踏板

- ◆ 材质：合成橡胶
 - ◆ 尺寸：525*115毫米
 - ◆ 厚度：≥32毫米
- Rubber Step**
- ◆ Material: Synthetic rubber
 - ◆ Size: 525*115mm
 - ◆ Thickness: ≥32mm



铝合金踏板

- ◆ 材质：铝合金
 - ◆ 尺寸：525*115毫米
 - ◆ 厚度：≥30毫米
- Aluminum Step**
- ◆ Material: Aluminum alloy
 - ◆ Size: 525*115mm
 - ◆ Thickness: ≥30mm



绳梯吸盘

- 材质：磁铁
验证负荷：200KG,300KG,500KG
- Ladder Magnet**
Material: Magnet
Proof load: 200KG,300KG,500KG

罗伯逊担架

衬架：硬木

面料：帆布

水平安全负荷：120KGS

垂直安全负荷：120KGS


Robertson stretcher

Inner Frame: Hard wood

Fabric: Canvas

Horizontal Safety:120KGS

Vereical Safety:120KGS

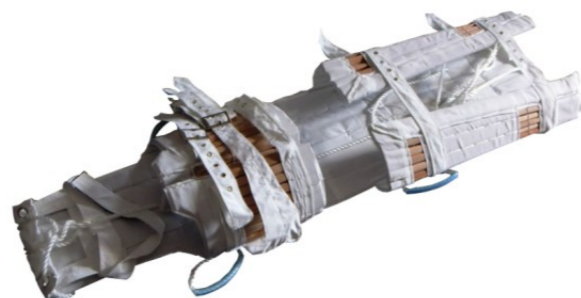

篮式担架

外壳：ABS 塑料

配件：含4根金属扣安全带，1个脚踏板，1套掉绳

承重：270kgs

尺寸：219×64×18cm

Basket Stretcher

Cover: ABS plastic

Accessories:4 sets safety belt/1pieces foot pedal/one safe and secure sling

Loading Strength: 270kgs

Size:219×64×18cm



CE

篮式担架 可分体设计

外壳：ABS 塑料

配件：含4根金属扣安全带，1个脚踏板，1套掉绳

承重：270kgs

尺寸：219×64×18cm

Basket Stretcher (Detachable Design)

Cover: ABS plastic

Accessories:4 sets safety belt/

1pieces foot pedal/one safe and secure sling

Loading Strength: 270kgs

Size:219×64×18cm



CE

推车式担架

2组上车轮可适用于不同高度的救护车。

靠背角度由气弹簧调节，范围0-65°，

折腿机构由两侧把手控制，担架配有保险锁，

上救护车时打开，担架站立时锁住，

仅需一人就可把担架推上救护车。

本担架由高强度铝合金材料制成，

φ125mm宽面橡胶轮，两个带刹。

附件：防水无缝PVC床垫（5cm厚度海绵），3根安全带，

用于胸部，臀部和膝部，固定装置 L01-1。

选配件：盐水架 I01，枕头，氧气瓶支架 H01 OR H02。



CE

Cart Stretcher

2 sets of upper wheels can be adapted to ambulances of different heights.

Backrest angle is adjusted by gas spring, range 0-65°.

The leg-folding mechanism is controlled by the handles on both sides, the stretcher is equipped with a safety lock, which is opened when the ambulance is on, and locked when the stretcher is standing.

Only one person can push the stretcher onto the ambulance.

This stretcher is made of high-strength aluminum alloy material.

φ 125mm wide-surface rubber wheels, two with brakes.

Accessories: waterproof seamless PVC mattress (5cm thick sponge),

3 seat belts for chest, hips and knees, fixing device L01-1.

Optional accessories: salt water rack I01, pillow, oxygen bottle holder H01 OR H02.

折叠担架

由高强度铝合金和耐撕裂牛津革材料制成

可选颜色：橘黄,蓝色，军绿,迷彩色

可选面料：牛津革,橘黄PVC

含2根安全带,拎包



CE

Folding Stretcher

Made of high-strength aluminum alloy and tear-resistant Oxford leather material

Available colors: orange, blue, army green, camouflage

Optional fabric: Oxford leather, orange PVC

With 2 seat belts, carry bag

气动抛绳枪

PNEUMATIC LINE THROWERS

KUNGGU1

型号: PTQ7.0-Y230Q210

标准尺寸: 便携式背包 930mmx320mmx200mm

便携式弹包 1300mmx360mmx230mm

弹头配置: 抛绳救援弹x2 (内置250m救援绳)

训练弹x1 (弹性材质, 耐冲击)

水用救援弹X2 (内置200m救援绳带自动充气救生圈)

150m绳包x1

工作压力: 7MPa (70bar/1015psi)

内置1.5L碳纤维气瓶: 30MPa (300bar/4350psi)

设置重量: 总重: 33kg (枪包/16.5kg 弹包/17.3kg)

基本组件: 9kg

发射参数: 发射初速≥60m/s 空中飞行时间: 3~5s

抛投质量≥1.8kg 抛射偏差角度≤5°

抛射距离: 水用时抛射自动充气救生圈最远≥210m

陆用时抛射距离最远≥230m

抛绳规格: Φ3mm(抛绳拉力不小于2000N)

Model: PTQ7.0-Y230Q210

Standard Size: Portable backpack 930mmx320mmx200mm

Portable bullet pack 1300mmx360mmx230

Warhead Preparation:

Throwing rope rescue bullet x2 (built-in 250m rescue rope)

Training bullet x1 (elastic material, impact resistance)

Water rescue bullet X2 (built-in 200m rescue rope

with automatic inflatable life buoy) 150m rope bag x 1

Working Pressure: 7MPa (70bar/1015psi)

Built-in 1.5L carbon fiber gas cylinder:30MPa (300bar/4350psi)

Set Weight: Total weight: 33kg (gun bag / 16.5kg, bullet bag / 17.3kg)

Basic Components: 9kg

Launch Parameters: Launch Velocity ≥60m / s

Flight Time: 3 ~ 5s

Throwing Mass: ≥1.8kg

Throwing Deviation Angle: ≤5°



遥控智能救生圈

REMOTE CONTROL SMART LIFEBOUOY



水上守护精灵 快速救援神器



全程快速救援

空程航速4m/s, 可快速到达落水者身边进行施救; 载重(80kg)速度1.5m/s; 具备实现对落水者进行绳索救援并带回岸边的全程救援能力。






精准遥控

采用枪式遥控器, 可实现500米超远距离控制, 操作简便, 可精准控制救生圈行进路线。



无二次伤害

螺旋桨采用特制防护外壳, 可防止异物缠绕与人体毛发缠绕; 前置防撞护垫, 有效防止行进过程中对人体造成碰撞伤害。

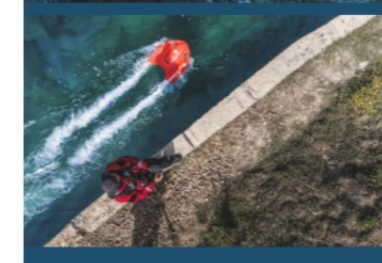

材料: 高密度聚乙烯+聚氨酯

颜色: 橘色

使用时间: 40分钟

单螺旋桨功率: 1800W

Li-battery: 24V, 32Ah

控制器距离: 300米

浮力: 18公斤 / 48 h

Material: HDPE+PS polyfoam

Color: Orange

Use Time: 40 MINS

Single Propeller Power: 1800W

Li-battery: 24V, 32Ah

Controller Distance: 300 meter

Buoyancy: 18KG/48H

船用配件

MARINE ACCESSORIES

KUNGGU1



量油尺 Tape oil gauge

- ◆Type: 10 20 25 30米
- ◆Type: 10 20 25 30m
- ◆材料: 不锈钢
- ◆Material:Stainless steel



测深锤 Sounding hammer

- ◆规格: 3.5Kg /36米的测深绳, 5Kg /50米测深绳, 12.7kg /230米的测深绳
- ◆Type: 3.5Kg/36m rope, 5Kg/50m rope, 12.7kg/230m rope
- ◆材料: 铅
- ◆Material:Lead



船用倾斜仪 Clinometer

- ◆测量范围: 0-70度
- ◆0-70°
- ◆尺寸: 400x240mm
- ◆Size: 400x240mm



海图分规 Chart dividers

- ◆规格: 150mm 170mm 200mm
- ◆Type: 150mm 170mm 200mm
- ◆材料: 黄铜
- ◆Material:Brass



铜尺 Copper ruler



铜滑轮 Copper block




雾钟 Fog bell

- ◆直径: 150/200/250/300毫米
- ◆Diameter: 150/200/250/300mm



铜锣 Gong

- ◆直径: 400毫米
- ◆Diameter: 400mm



信号球 Signal ball

- ◆类型: 圆柱形, 球型, 双锥形, 单锥形
- ◆Diameter:
- ◆Type: Spherical,Cylindrical,Cone, Double cone,Diamond

船用配件

MARINE ACCESSORIES



IMO标贴
IMO Stickers



挡鼠板
Rat blocked



磁罗经
Magnetic Compass



六分仪
Sextant



平行尺
Parallel ruler



三角尺
Channel triangle



气压计
Barometer



时钟
Clock



望远镜
Binocular

化学品防护服

CHEMICAL PROTECTIVE CLOTHING



产品描述

本化学晶防护服由帽、连衣裤、防化手套、防护靴组成，为半封闭式，是为保护作业人员免遭化学危险品等侵害而穿着的防护服。在规范操作下其可以重复使用。

主要适用于工业作业场所作业人员防护液态酸碱类化学晶使用。

Product Description

The chemical protective clothing is composed of a hat, a jumpsuit, anti-chemical gloves and protective boots. It is a semi-enclosed form of protective clothing to protect the working personnel from dangerous chemicals and other hazards. It can be reused under standard operation.

It is mainly used to protect liquid acid and alkali chemicals from industrial workers.

防护等级 Level	三级 Level three	
材料 Material	阻燃防化胶布（橡塑） Flame retardant chemical PVC tape	
胶布厚度 Thickness of the rubber fabric	0.45±0.05mm	
颜色 Color	黄色 Yellow	
渗透时间 Permeation Time	98%硫酸 98% Sulfuric acid	≥240min
	30%盐酸 30% Muriatic acid	≥240min
	60%硝酸 60% Nitric acid	≥240min
	40%氢氧化钠 40% Sodium hydrate	≥240min
执行标准 Inspection Standard	GB 24540-2009	

规格 Specifications	衣长 Chest	胸围 Chest	腰围 Waist	鞋码 Shoe	适合身高 Suitable height
L	171cm	130cm	125cm	43cm	170~180cm

一次性防护服

COVERALL



- 1.型号：RSFH01
- 2.材料：高抗静电水刺透气膜复合无纺布，防水PE带
- 3.颜色：白色
- 4.结构：全身连体衣
- 5.尺寸：S/M/L/XL/XXL/XXXL
- 6.重量：0.25kg/件
- 7.密度：63-65g/m²
- 8.标准：EN14126，有CE证书
- 9.使用范围：普通病房、实验室、清洁房间、室外喷涂、消毒、油漆工作等。

功能

- 1.防护服柔软、舒适、轻便。
- 2.有效阻隔微生物、颗粒物、气体，也能阻隔病人的血液、唾液、尿液和其他液体。
- 3.具有透气舒适的感觉，足够的牢固度和耐久性可以进行特殊灭菌处理。
- 4.具有良好的抗撕裂性和一定的耐磨性。
- 5.本产品主要适用于普通病房、实验室、机械维修、除尘、油漆作业、农业病虫害防治，不能用于医院手术或其他高等级无菌操作部门。

- 1.Model:RSFH01
- 2.Material: High Antistatic Spunlace Nonwovens Breathable Membrane Composite/Waterproof PE film
- 3.Color: White
- 4.Structure: Coverall
- 5.Size: S/M/L/XL/XXL/XXXL
- 6.Weight: 0.25kg
- 7.Density:63-65//m²
- 8.Standard:EN 14126, GB 19082
- 9.Application:Epidemic prevention, Clean room,Construction, Painting, Laboratory, Rescue,etc.

Functions:

- 1.Disposable protective clothing is soft comfortable and light.
- 2.Effective barrier microorganisms,particulate matter,gas,also can block the patient's blood,saliva,urine,and other liquids.
- 3.With breathable comfort feeling,adequate integrity and durability can also be maintained after specific sterilization treatment.
- 4.With tear resistance and certain abrasability,no dust.
- 5.This product is mainly applicable to general ward, laboratory, mechanical maintenance, dust removal operation, paint operation, agricultural pest control, etc.It can not use for hospital surgery or other sterile operation department.



电动送风过滤呼吸器/防弹衣

Powered Air Purifying Respirator / Bulletproof Vests

电动送风过滤呼吸器

型号: PRF-103
使用过滤器:1-3个
过滤器功能: 防各类颗粒物, 防有毒有害气体
过滤精度:0.3μm,
过滤效率:99.97%,
使用时间:6-20小时(根据风力不同)
电池容量:4800mAH
Powered air purifying respirator
Model: PRF - 103
Use Filters :1-3 unit
Filter Function: Prevent all kinds of particles,
prevent poisonous and harmful gases
Filtration Accuracy :0.3 m
Filtration Efficiency :99.97%
Service Time :6-20 hours (depending on the wind)
Battery Capacity :4800mAH



防弹衣

采用KEVLAR,TWARON,UHMWPE 等高性能抗弹复合材料, 性能满足GA141-2010, NIJ0101.06标准, 级别涵盖NIJ0101.06 I A-III A,GA141-2010 1-3级。
Bulletproof Vest
High performance composite materials such as KEVLAR,TWARON,UHMWPE are adopted in the research of the vest which conformed to the standards of GA141-2010 and NIJ0101.06. The protective level involves the level of NIJ0101.06 level I A-III A,GA141-2010 level 1-3.



防弹衣

BULLETPROOF VESTS

防弹头盔

防弹头盔由凯芙拉或高分子聚乙烯合成材料制成, 采用先进的聚脲防护涂层技术, 具有耐磨耐高温防火阻燃和防化学腐蚀的特性。防弹性能可以满足中国GA293-2012警用防弹头盔2级和美国NIJ 标准0101.06和0101.01 IIIA 标准。盔型具有FAST,PASGT,MICH 2000 等。夜视仪支架和侧面导轨以及防弹面罩都可供客户选择。

Bulletproof helmet

Bulletproof helmet,made from kevlar or PE composites,adopting the advanced polyurea protective coating technique,is wearproof, heat,fire and chemical corrsion resistant. The ballistic performance can meet China GA293-2012 Level 2 and the USA NIJ Standard 0101.06&NIJ 0101.01 IIIA ballistic requirements.Popular model,FAST,PASGT,MICH 2000 is all available.Side Rails,NVG mounting system and bulletproof visor is optional to customize.



防弹插板

采用高性能纤维增强树脂基复合材料, 新型陶瓷材料, 高性能装甲钢材料经一体化成型复合而成, 包含单曲面、双曲面结构形式; 单独防护 (STD),协同防护 (ICW) 应用形式; 防护级别涵盖NIJ0101.06 III级、III-Plus级、IV级和GA141-2010 4-6级, 以及欧洲相关标准。

Bulletproof Plate

New types of high performance materials such as fiber reinforceel resin matrix composites,ceramic materials,armor steel are adopted in the product.The plates include single curved surface,double curved surface style;single protection(STD),combined protection application(ICW) styles;the production level involves the level of NIJ0101.06 level III,level III-Plus,Level IV and Ga141-2010 level 4-6 and the European relevant standards.

